EDGECove AC Indirect



1.4" Low-Profile Linear LED Cove Mount

















Features & Benefits

Exceptional Performance

Advanced Edge-lit Technology. Up to 1,250 lm/ft, 150 lm/W efficacy

Wide Range of LED Selections

Static, Tunable White, and Dim-to-Warm. 80/90/95+ CRI, 2200K to 5000K CCT.

AC Power Input with Dimming & Control Options

Direct AC input (110V-277V) wide range of control options including 0-10V, DALI, DMX, and TRIAC dimming

Patented Innovations

Fusion Optix® Inside with unique SmartBeam® capabilities

Proprietary Optical Components

Provides excellent light distribution and high-transmission

Committed to Made-in-USA & Sustainability

Designed & built in Boston MA, Declare Listed and Red Free List materials

Compliance

UL Listed, Dry and Damp Locations

5-Year Warranty

Standard 5-year warranty, 50,000 hours




FIXTURE ORDERING Project Name Fixture Type 1) FIXTURE DESIGN **PRODUCT FIXTURE LENGTH COLOR & FINISH DAISY CHAIN** MOUNTING TYPE **ECV-ACI** 1.4" Low-Profile Edge-lit Lin-1FT 12in Nominal MWH Matte White (RAL9003) DN No: Daisy Chain (Single Input) FM **Fixed Mount** ear LED Cove with AC Power 2FT 24in Nominal Yes: Daisy Chain Adjustable Angle 3FT 36in Nominal for Indirect Lighting Mount 48in Nominal 4FT X_{-} Specify X', Y' 2) LED LIGHT ENGINE CRI ССТ INDIRECT OUTPUT **BEAM PATTERN** S80 Std. 80 CRI 22 2200K LAM Lambertian 25 250 lm/ft Asymmetric 40° at 70° Tilt 2700K A4070 S90 Std. 90 CRI 27 35 350 lm/ft HE80 High-Eff. 80 CRI 30 3000K A6040 Asymmetric 60° at 40° Tilt 50 500 lm/ft HE90 High-Eff. 90 CRI 35 3500K X_ Specify Beam 75 750 lm/ft HD95 High-Def. 95 CRI 40 4000K 100 1,000 lm/ft SUN 125 Full SunLike 50 5000K 1,250 LM/FT SBIOS Static BIOS 3022DW 3000K to 2200K Dim-to-Warm Specify Im/ft X_ Dynamic BIOS DRIOS 3527DW 3500K to 2700K Dim-to-Warm Tunable White BIOS **TBIOS** Specify CCT 3) FIXTURE POWER & CONTROLS LINE VOLTAGE (DC) INTEGRAL DRIVER (POWER) **EMERGENCY BACKUP** CONTROL SYSTEM¹ Factory Non-Dimming 120V 120V **FDND** NN Not Needed Not Needed NN Factory 0-10V 1% Dim FD01 LUT 277V 277V **EMC Emergency Circuit** Lutron Factory 0-10V 10% Dim FD10 347V 347V **EMB Emergency Battery** COO Cooper UNV UNV **FDDA** Factory DALI 0.1% Dim (10 W — Onboard) CAS Casambi **FDDX** Factory DMX Dim Specify Backup Specify Control System X_ X_{-} Factory TRIAC Dim Lutron Hi-Lume 1% Dim **FDTR** LD01 Lutron 5-Series 5% Dim LD05 **ED00** eldoLED 0-10V 0.1% Dim ED01 eldoLED 0-10V 1% Dim **EDDA** eldoLED DALI 0.1% Dim Specify Driver X_{-} 4) FIXTURE MOUNTING & ACCESSORIES POWER EXTENSION CORD EC6WH 6" White Extension Cable EC12WH 12" White Extension Cable EC24WH 24" White Extension Cable FC48WH 48" White Extension Cable **NOTES**

Footnotes: ¹ The control system and driver must be compatible.




FIXTURE DESIGN

Dimensions



Fixed Mount

optics decide beam distribution

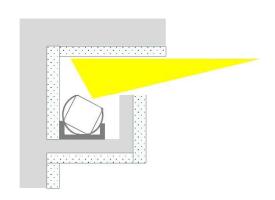


Adjustable Angle Mount

beam distribution by additional tilting of fixture



To download BIM (Revit) Files, please click or scan the QR Code.

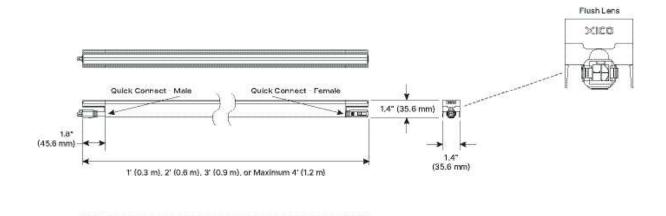

Length

Length Options

1', 2', 3', 4' nominal, or custom within 6"

Finish

Housing Color (Matte Finish)



White (RAL9003)

Housing Material 6063-T5 extruded, recycled aluminum

Mounting Brackets Sheet metal

Voltage

Fixture Voltage (AC) 120-277 VAC and 347 VAC, 50/60 Hz

SMARTBEAM® TECHNOLOGY

The Ultimate Control of Lighting Distributions


SmartBeam makes it easy to specify the exact light required for any architectural space. Available in every XICO product; it is now possible to create truly tailored and engaging lighting that transform spaces, improves visual comfort, and saves energy.

To learn more about our SmartBeam Technology, please click or scan the QR Code.




INDIRECT PHOTOMETRICS

Static White Light




LAM: Lambertian

Length	24"
LED	HE90
CRI/CCT	90+/3500K
Lumens	1,000
lm/ft	500
Watts	6.8
W/ft	3.4
LPW	150



A4070: Asymmetric 40° at 70° Tilt

Length	24"
LED	HE90
CRI/CCT	90+/3500K
Lumens	1,000
lm/ft	500
Watts	6.8
W/ft	3.4
LPW	150




A6040: Asymmetric 60° at 40° Tilt


Length	24"
LED	HE90
CRI/CCT	90+/3500K
Lumens	1,000
lm/ft	500
Watts	6.8
W/ft	3.4
LPW	150

LED SELECTION GUIDE

S80: Standard 80+ CRI





HD95: High-Definition 95+ CRI



S90: Standard 90+ CRI


SUN: Full Spectrum "SunLike"

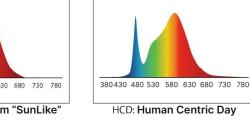




HE90: High-Efficiency 90+ CRI

HCN: Human Centric Night





Melanopic Sensitivity

380 430 480 530 580 630 680 730 780

HE80: High-Efficiency 80+ CRI

Melanopic Sensitivity
380 430 480 530 580 630 680 730 780

Static White Light (LED Light Engine Only)

State White Light (LLD Light Colly)									
		TYPICAL LED DATA							
CODE	DESCRIPTION	ССТ	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	M/P Ratio	LPW
S80	Standard 80 CRI	3500K	82.5	7.8	84	96.7	82.5	0.51	190
S90	Standard 90 CRI	3500K	91	54.3	89.3	98.9	89.2	0.55	175
HE80	High Efficiency 80 CRI	3500K	82.1	5.9	83	94.2	81.2	0.52	210
HE90	High Efficiency 90 CRI	3500K	92.2	90	90.7	103.8	92.1	0.56	190
HD95	High Definition 95 CRI	3500K	97.1	95	_	_	-	0.70	163
SUN	Full Spectrum SunLike®	3500K	95	85	_	_	_	_	130
HCD	Human Centric Day	4000K	83	95	-	_	-	0.92	155
HCN	Human Centric Night	2700K	80	-	-	_	-	0.44	134

LPW Efficacy Conversion Chart (LED Only)

	S80	S90	HE80	HE90	HD95	SUN	HCD	HCN
LPW (LED Only)	196	171	207	195		129	133	133
Ratio	1.00	0.87	1.06	0.99		0.66	0.68	0.68

LPW Efficacy Conversion Chart

	CCT SELECTED								
CODE	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K	
S80	-	0.91	0.96	1.00	1.04	1.11	1.11	1.11	
S90	_	0.91	0.96	1.00	1.04	1.11	1.11	1.11	
HE80	_	0.96	0.99	1.00	1.03	1.04	1.03	1.03	
HE90	_	0.91	0.96	1.00	1.04	1.11	N/A	N/A	
HD95	_	0.91	0.96	1.00	1.04	1.11	1.03	1.04	
SUN95	_	0.90	0.92	1.00	1.01	1.07	1.04	1.05	
HCD	_	N/A	0.96	1.00	1.04	1.04	1.04	1.04	
HCN	_	0.87	0.96	1.00	1.04	N/A	N/A	N/A	

BIOS TECHNOLOGY

Choosing Your BIOS Solution




To learn more about BIOS Technology, please click or scan the QR Code.




BIOS is offered in four Circadian LED Solutions with BIOS SkyBlue Technology — Biological Static, Biological Dynamic, Biological Tunable, and Biological Dim-to-Warm. BIOS SkyBlue™ Technology includes a blue peak at 490nm that provides an effective daytime circadian signal using standard architectural color temperatures.


BIOS Static




BIOS Dynamic



BIOS Tunable



BIOS Dim-to-Warm



Daytime No color change when dimmed

Spaces that operate during daytime hours — 7am and 7pm Daytime & Evening 500K shift when dimmed

Spaces that operate overnight — after 7pm and before 7am

Daytime & Evening Dims to 2700K

Spaces that operate with overnight shifts — after 7pm and before 7am

Daytime & Evening Dims from cool to warm

Spaces where people sleep after 7pm and before 7am

Circadian and Human Centric Light

		BIO-DIMMING MODULE TECHNOLOGY GUIDE									
CODE	DESCRIPTION	Driver	Driver Vol tage	ССТ	Requires BIO-Dimming Module	Lighting Control	BIOS SkyBlue (490nm)				
SBIOS	BIOS Static	DIM1	0-10V Dimming to 1% Dim-to-Dark	No CCT Change	No	Intensity Dimming Control Only	Always Present				
DBIOS	BIOS Dynamic		0-10V Intensity		Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming				
DBIOS-2	BIOS Dynamic (Two Channel)	BIODIM1	Dimming to 1% Dim-to-Dark	500K Shift	No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"				
TBIOS	BIOS Tunable		0-10V Control of Intensity & CCT on Separate 2 Channels / DALI Control of Intensity & CCT on Separate 2 Channels	Dims to 2700K	Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming				
TBIOS-2	BIOS Tunable (Two Channel)	ATW / DTW			No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"				
DWBIOS	BIOS Dim-to-Warm				Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming				
DWBIOS-2	BIOS Dim-to-Warm (Two Channel)	_	-	Dims to 2200K	No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"				

FIXTURE POWER & CONTROLS

Voltage

LED Driver Factory Selected, 36-39V Constant Current

Emergency Backup

Backup Types Emergency Circuit, Emergency Battery (Onboard), and other emergency backups are available

Wiring Typically the Emergency Backup is wired to 48" sections

Power 10 W

Illumination Time 90 minutes

Partners







Control Systems Integral Driver


Factory Non-Dimming, Factory 0-10V 1% Dim, Factory 0-10V 10% Dim, Factory DALI 0.1% Dim, Factory Other

DMX Dim, Factory TRIAC Dim, eldoLED 0-10V 0.1% Dim, eldoLED 0-10V 1% Dim, eldoLED DALI 0.1% Dim,

and other drivers are available, consult factory (not all integral)

Hi-Lume 1% Dimming and 5-Series 5% Dimming Lutron

Cooper Compatible driver Casambi (wireless) Compatible driver



Drivers are integral to the fixture and are included. They provide 0-10V, DALI, DMX, and TRIAC dimming. Also compatible with Cooper and other common building control systems, including PoE and wireless.

FIXTURE MOUNTING & ACCESSORIES

Mounting Type

Cove Mount Installs into a cove. Available with a range of accessories, mounts and inserts that provide easy


customization of visual appearance and performance enhancements.

Power Extension Cord

Sizes and Color 6", 12", 24", and 48", White Extension Cords

Connector (AC)


Connector Options Easy Plug-and-Play Factory Installed Connectors

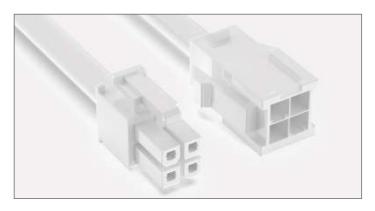

Factory Connectors

Standard Lengths & Continuous Runs

Maximum length of one fixture is 4'. Longer runs can be produced by connecting fixtures or daisy chain. Customer approval of shop drawings is required prior to build of any non-standard length order.

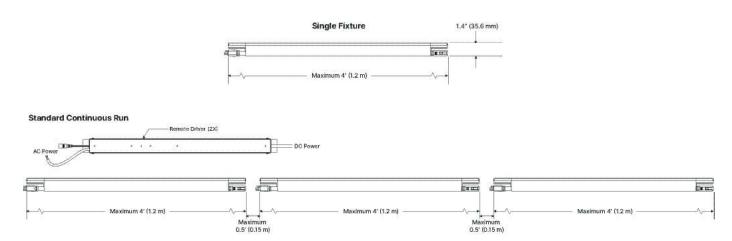

STANDARDS & CERTIFICATIONS



Declare Listed

Declare labels provide a quick and reliable way to make choices about the environmental footprint and safety of the product. Declare is internationally recognized and the labels can be found on the product, product packaging, or company website. Visit xicoled.com for Declare Listed details.



Red List Free

An industry standard certification for LED lighting products based on the International Living Future Institute (ILFI). These products only use materials based on the "Red List of Toxic Chemicals" (a list of chemicals and materials known to be hazardous to people and/or the Earth) that are safe, healthy, and environmentally sustainable.

Certifications

Compliance BAA & TAA compliant in-house manufacturing in Boston, MA with North American supply chain

Certifications







Sustainability Declare Listed and Red List Free

Packaging Low carbon, environmentally conscious packaging and shipping methods

Environmental Suitability

IP Rating Suitable for Dry and Damp Locations, indoor use only

Recyclable SmartOptics and all powder coated and anodized parts are fully recyclable at end of life

Reliability

Manufacturing All XICO products and associated optics and LED engines are assembled at our factory in

Woburn, MA

Quality Assurance Each product is engineered reliability and quality assurance tested

Warranty & Terms

5-YR Warranty







For details on our warranty and business terms, please click or scan the QR Code.