

EDGETilt3 Recessed

3" Edge-Lit Linear LED Recessed In-Ceiling or In-Wall



Features & Benefits

Exceptional Performance
Up to 1,000 lm/ft, 135 lm/W efficacy

Wide Range of LED Selections
Static and Tunable White

Designed with Options
Wide choice of SmartOptic® lenses, beam distributions, 80/90/95+ CRI, 2200K to 5000K CCT, and 0-10V, DALI, DMX, and TRIAC dimming

Patented Innovations
Fusion® Optix Inside with unique SmartBeam® capabilities

Proprietary Optical Components
Provides excellent light distribution and high-transmission

Committed to Sustainability
Declare Listed and Red Free List materials

Compliance
UL Listed, Dry and Damp Locations

5-Year Warranty
Standard 5-year warranty, 50,000 hours

Designed & Built in
BOSTON

Declare



FIXTURE ORDERING

Project Name

1) FIXTURE DESIGN

Fixture Type

PRODUCT	MOUNTING STYLE		LENGTH		COLOR + FINISH		END CAP	
ETI3-R								
2.00" Edge-Lit	DC	Drywall Ceiling	2FT	24in Nominal	MWH	Matte White (RAL9003)	E1	Flanged End Cap
Linear LED	DW	Drywall Wall	4FT	48" Nominal	MBK	Matte Black (RAL9005)	E2	Flange-Less End Cap
Wall Mount	T1	TBar Grid	6FT	72" Nominal	MGR	Matte Gray (RAL7001)		
	T2		8FT	96" Nominal	CAE	Clear Anodized Effect		
	T3		10FT	120" Nominal	RAL_	Specify RAL#		
			X_	Specify X', Y"				

2) LED LIGHT ENGINE

CRI		CCT		DIRECT OPTICS		DIRECT OUTPUT	
S80	Std. 80 CRI	22	2200K	DLAM	Lambertian	35	350 lm/ft
S90	Std. 90 CRI	27	2700K	DBW65	Batwing 65°	50	500 lm/ft
HE80	High-Eff. 80 CRI	30	3000K	DA5025	Asymmetric 50° at 25° Tilt	75	750 lm/ft
HE90	High-Eff. 90 CRI	35	3500K			100	1,000 lm/ft
HD95	High-Def. 95 CRI	40	4000K	X_	Specify Beam	X_	Specify lm/ft
SUN	Full SunLike	50	5000K				
		X_	Specify CCT				

3) FIXTURE POWER & CONTROLS

LINE VOLTAGE (DC)		REMOTE DRIVER (POWER)		REMOTE DRIVER BOX ¹		EMERGENCY BACKUP		CONTROL SYSTEM ³	
UNV	120/277V	FDND	Factory Non-Dimming	NN	Not Needed	NN	Not Needed	NN	Not Needed
347	347V	FD01	Factory 0-10V 1% Dim	RLDB²	Remote Linear Driver Box (driver included by default)	EMC	Emergency Circuit	LUT	Lutron
		FD10	Factory 0-10V 10% Dim			EMB	Emergency Battery (10 W — Remote)	COO	Cooper
		FDDA	Factory DALI 0.1% Dim	RX2D²	Optional Remote XBox2 Driver, Up to 2 Drivers	X_	Specify Backup	CAS	Casambi
		FDDX	Factory DMX Dim	RX3D²	Optional Remote XBox3 Driver, Up to 3 Drivers			X_	Specify Control System
		FDTR	Factory TRIAC Dim	RX5D²	Optional Remote XBox5 Driver, Up to 5 Drivers				
		LD01	Lutron Hi-Lume 1% Dim						
		LD05	Lutron 5-Series 5% Dim						
		ED00	eldoLED 0-10V 0.1% Dim						
		ED01	eldoLED 0-10V 1% Dim						
		EDDA	eldoLED DALI 0.1% Dim						
		X_	Specify Driver						

4) ACCESSORIES

GLARE REDUCTION

BLB Black Linear Baffle
WLB White Linear Baffle


Footnotes: ¹ Remote distance is dependent on driver type, up to 100' (30.5 m). ² Creates a clean and organized power solution for multiple fixture installations. ³ The control system and driver must be compatible.

FIXTURE MOUNTING

Choice of mounting styles




To download BIM (Revit) Files, please click or scan the QR Code.

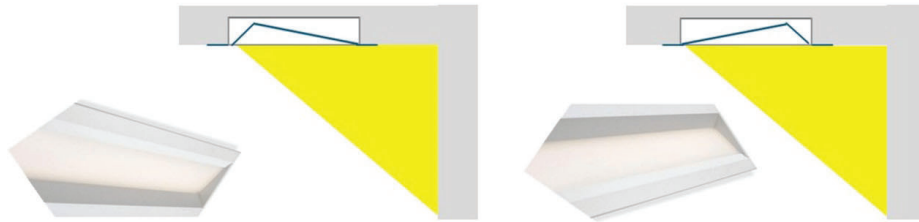

Ceiling – Accent Surface Behind
optics decide beam distribution

Ceiling – Accent Surface Forward
beam distribution by additional tilting of fixture

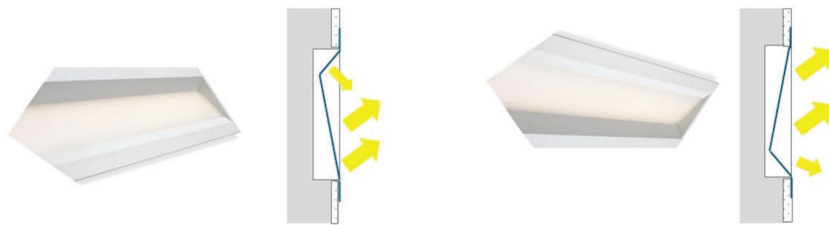


Wall - Accent Surface Up (ASU)
Uplight reflects off accent surface above the lens

Wall - Accent Surface Down (ASD)
Uplight reflects off accent surface below the lens

CEILING MOUNTING

Choice of accent surface orientation

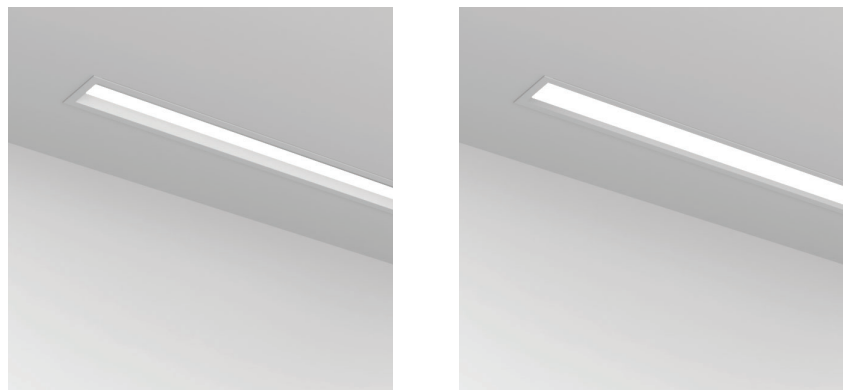

WALL MOUNTING

Choice of accent surface orientation



SMARTBEAM® TECHNOLOGY

The Ultimate Control of Lighting Distributions

SmartBeam makes it easy to specify the exact light required for any architectural space. Available in every XICO product; it is now possible to create truly tailored and engaging lighting that transform spaces, improves visual comfort, and saves energy.


To learn more about our SmartBeam Technology, please click or scan the QR Code.



PHOTOMETRICS


Static White Light

DLAM: Lambertian




Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	3,000
lm/ft	746
Watts	27
W/ft	6.8
LPW	110

DBW65: Batwing 65°



Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	3,000
lm/ft	743
Watts	27
W/ft	6.8
LPW	109


DA5025: Asymmetric 50° at 25° Tilt




Length	48"
LED	HE80
CRI/CCT	80+/3500K
Lumens	3,000
lm/ft	738
Watts	10.5
W/ft	5.3
LPW	141

LED SELECTION GUIDE


S80: Standard 80+ CRI

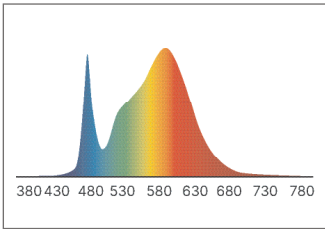


S90: Standard 90+ CRI

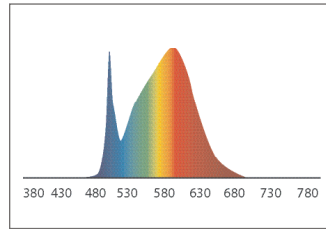


HE80: High-Efficiency 80+ CRI

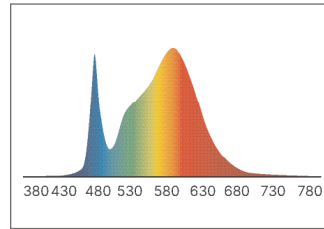


HE90: High-Efficiency 90+ CRI

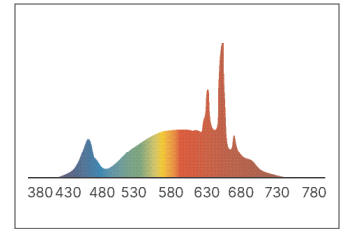


HD95: High-Definition 95+ CRI

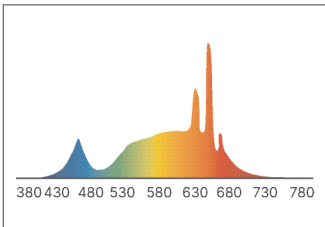


SUN: Full Spectrum "SunLike"

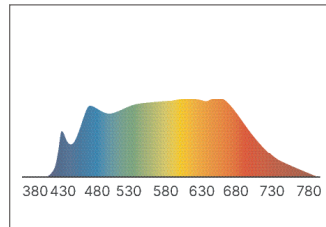

HCD: Human Centric Day

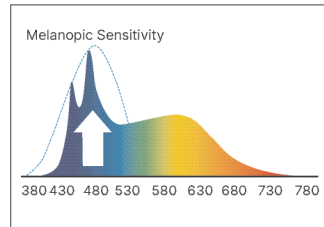

HCN: Human Centric Night

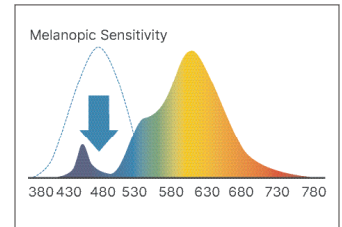

Static White Light (LED Light Engine Only)

CODE	DESCRIPTION	TYPICAL LED DATA							
		CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	M/P Ratio	LPW
S80	Standard 80 CRI	3500K	82.5	7.8	84	96.7	82.5	0.51	190
S90	Standard 90 CRI	3500K	91	54.3	89.3	98.9	89.2	0.55	175
HE80	High Efficiency 80 CRI	3500K	82.1	5.9	83	94.2	81.2	0.52	210
HE90	High Efficiency 90 CRI	3500K	92.2	90	90.7	103.8	92.1	0.56	190
HD95	High Definition 95 CRI	3500K	97.1	95	-	-	-	0.70	163
SUN	Full Spectrum SunLike®	3500K	95	85	-	-	-	-	130
HCD	Human Centric Day	4000K	83	95	-	-	-	0.92	155
HCN	Human Centric Night	2700K	80	-	-	-	-	0.44	134

LPW Efficacy Conversion Chart

CODE	CCT SELECTED							
	2200K	2700K	3000K	3500K	4000K	5000K	5700K	6500K
S80	-	0.91	0.96	1.00	1.04	1.11	1.11	1.11
S90	-	0.91	0.96	1.00	1.04	1.11	1.11	1.11
HE80	-	0.96	0.99	1.00	1.03	1.04	1.03	1.03
HE90	-	0.91	0.96	1.00	1.04	1.11	N/A	N/A
HD95	-	0.91	0.96	1.00	1.04	1.11	1.03	1.04
SUN95	-	0.90	0.92	1.00	1.01	1.07	1.04	1.05
HCD	-	N/A	0.96	1.00	1.04	1.04	1.04	1.04
HCN	-	0.87	0.96	1.00	1.04	N/A	N/A	N/A

BIOS TECHNOLOGY

Choosing Your BIOS Solution


BIOS is offered in four Circadian LED Solutions with BIOS SkyBlue Technology — Biological Static, Biological Dynamic, Biological Tunable, and Biological Dim-to-Warm. BIOS SkyBlue™ Technology includes a blue peak at 490nm that provides an effective daytime circadian signal using standard architectural color temperatures.




To learn more about BIOS Technology, please click or scan the QR Code.




BIOS Static




BIOS Dynamic



BIOS Tunable



BIOS Dim-to-Warm



Daytime

No color change when dimmed

Spaces that operate during daytime hours — 7am and 7pm

Daytime & Evening

500K shift when dimmed

Spaces that operate overnight — after 7pm and before 7am

Daytime & Evening

Dims to 2700K

Spaces that operate with overnight shifts — after 7pm and before 7am

Daytime & Evening

Dims from cool to warm

Spaces where people sleep — after 7pm and before 7am

Circadian and Human Centric Light

CODE	DESCRIPTION	BIO-DIMMING MODULE TECHNOLOGY GUIDE					
		Driver	Driver Voltage	CCT	Requires BIO-Dimming Module	Lighting Control	BIOS SkyBlue (490nm)
SBIOS	BIOS Static	DIM1	0-10V Dimming to 1% Dim-to-Dark	No CCT Change	No	Intensity Dimming Control Only	Always Present
DBIOS	BIOS Dynamic	BIODIM1	0-10V Intensity Dimming to 1% Dim-to-Dark	500K Shift	Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming
DBIOS-2	BIOS Dynamic (Two Channel)				No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"
TBIOS	BIOS Tunable	ATW / DTW	0-10V Control of Intensity & CCT on Separate 2 Channels / DALI Control of Intensity & CCT on Separate 2 Channels	Dims to 2700K	Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming
TBIOS-2	BIOS Tunable (Two Channel)				No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"
DWBIOS	BIOS Dim-to-Warm	-	-	Dims to 2200K	Yes	Intensity Dimming & Spectrum Change Controlled Together	Removed with BIO-Dimming
DWBIOS-2	BIOS Dim-to-Warm (Two Channel)				No	Intensity Dimming & Spectrum Change Controlled Separately	Removed by Adjusting "Spectrum Channel"

FIXTURE DESIGN

Length

Length Options 2', 4', 6', 8', 10' nominal, or custom within 3"

Finish

Housing Colors (Matte Finish)



White (RAL9003)



Black (RAL9005)



Gray (RAL7001)



Clear Anodized Effect



Custom RAL

Housing Material 6063-T5 extruded, recycled aluminum

Mounting Brackets Sheet metal

End Cap

End Cap Option Flanged, matching design of body

End Cap Material Machined or cast aluminum

Optic

Lens Option Titled regressed lens

Lens Material Patented SmartOptics® made from Acrylic (PMMA)

FIXTURE POWER & CONTROLS

Voltage

Fixture Voltage (AC) 120–277 VAC and 347 VAC, 50/60 Hz

LED Driver Factory Selected, 36–39V Constant Current

Emergency Backup

Backup Types Emergency Circuit, Emergency Battery (Remote), and other emergency backups are available

Wiring Typically the Emergency Backup is wired to 48" sections

Power 10 W

Illumination Time 90 minutes

Partners




Control Systems Remote Drivers (Sold Separately)

Other Factory Non-Dimming, Factory 0-10V 1% Dim, Factory 0-10V 10% Dim, Factory DALI 0.1% Dim, Factory DMX Dim, Factory TRIAC Dim, eldoLED 0-10V 0.1% Dim, eldoLED 0-10V 1% Dim, eldoLED DALI 0.1% Dim, and other drivers are available, consult factory (not all integral)

Lutron Hi-Lume 1% Dimming and 5-Series 5% Dimming

Cooper Compatible driver

STANDARDS & CERTIFICATIONS

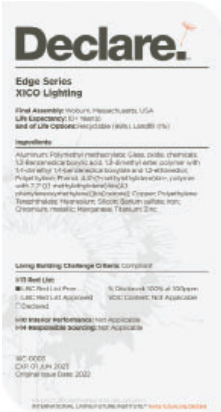

Declare Listed

Declare labels provide a quick and reliable way to make choices about the environmental footprint and safety of the product. Declare is internationally recognized and the labels can be found on the product, product packaging, or company website. Visit xicoled.com for Declare Listed details.



Red List Free

An industry standard certification for LED lighting products based on the International Living Future Institute (ILFI). These products only use materials based on the "Red List of Toxic Chemicals" (a list of chemicals and materials known to be hazardous to people and/or the Earth) that are safe, healthy, and environmentally sustainable.

Certifications

Compliance

BAA & TAA compliant in-house manufacturing in Boston, MA with North American supply chain

Certifications



Sustainability

Declare Listed and Red List Free

Packaging

Low carbon, environmentally conscious packaging and shipping methods

Environmental Suitability

IP Rating

Suitable for Dry and Damp Locations, indoor use only

Recyclable

SmartOptics and all powder coated and anodized parts are fully recyclable at end of life

Reliability

Manufacturing

All XICO products and associated optics and LED engines are assembled at our factory in Woburn, MA

Quality Assurance

Each product is engineered reliability and quality assurance tested

Warranty & Terms

5-YR Warranty

Business Terms



For details on our warranty and business terms, please click or scan the QR Code.